

# INSTALLATION INSTRUCTIONS

## XG Setup Instructions

The XG ground bars add strength to the bottom of the walls, especially when using the tabs is not possible on hardstanding.

**IMPORTANT: The walls should be hung as high a possible on the velcro around the eaves to minimise the ground bar rubbing on the ground.**

a. Assemble a single ground bar side at a time, a single assembled ground bar side comprises of 3 parts, two longer bars with a cut out end and a smaller aluminium joining sleeve.


To put a side together, take 2 of the longer bars and slide them into the small aluminium joining sleeve. An assembled ground bar is the same length as a wall.

b. From the outside of the marquee, slide the whole ground bar through the two pockets on the inside bottom of the wall. Be sure that the ends don't catch on the wall or miss a pocket as you pass them through the pockets.

c. Now slide the two cut out ends over the pins as seen above, put the R clip through the pin hole to hold the ground bar in place. Make sure the R clip is pushed through the pin hole enough so it does not fall out easily.

**IMPORTANT: Be careful when pushing the R clip through the hole that you don't injure your hands or fingers . Use your palm to push it down.**

d. Repeat the above steps for the remaining walls.

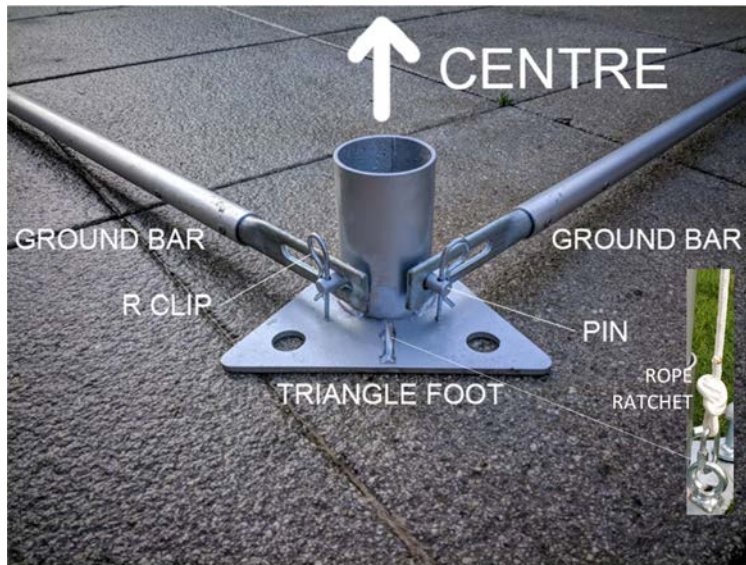

INSTALLATION